



Product Specification

10Gbps CDR 40KM SFP+ Transceiver

PLSFPP15192IR40

V20140818

Product Features

- | Up to 10Gbps data links
- | 40km with 9/125 μ m SMF
- | 1550nm EML laser
- | Duplex LC Connector
- | Hot-pluggable SFP+ footprint
- | Single 3.3V power supply
- | Operating temperature: -5 $^{\circ}$ C to 75 $^{\circ}$ C
- | Ethernet
- | CDR
- | RoHS
- | Digital Diagnostic Monitor(DDM)
- | Power Consumption < 1.2W

Applications

- √ 10GBase-ER/EW 10G
- √ SONET OC-192 IR2/3
- √ SDH STM S-64.2b/64.3b

1. Product Description

The PLSFPP15192IR40 is a 10Gbps enhanced small form factor pluggable SFP+ transceiver compatible with 10GBASE-ER/EW, SONET OC-192 IR2/3, SDH STM S-64.2b/64.3b. It is suitable for single-mode fiber (SMF) communications in 10Gbps Ethernet/SONET SDH.



2. Regulatory Compliance

TINOUT transceivers are Class 1 Laser Products comply with FDA regulations. Meet Class 1 eye safety requirements of EN 60825 and the electrical safety requirements of EN 60950.

3. Absolute Maximum Ratings

Parameter	Symbol	Min.	Max.	Unit
Supply Voltage	V _{CC}	-0.5	4	V
Storage Temperature	T _s	-40	85	°C
Operating Case Temperature	T _c	-5	75	°C

4. Recommended Operating Conditions

Parameter	Symbol	Min.	Typical	Max.	Unit
Operating Case Temperature	T _c	-5		75	°C
Power Supply Voltage	V _{CC}	3.15	3.3	3.45	V
Power Supply Current	I _{CC}			350	mA
Data Rate			10		GBps
Max Link Length on 9/125µm SMF	L _{max}			40	km

5. Optical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Centre Wavelength	λ _c	1530	1550	1570	nm
Spectral Width (RMS)	σ			3	nm
Average Output Power	P _{out}	-2		5	dBm
Extinction Ratio	ER	8			dB
Average Launch Power of Off Transmitter	P _{off}			-30	dBm



Receiver					
Centre Wavelength	λ_c	1200		1600	nm
Receiver Sensitivity	P_{IN}			-16	dBm
Receiver Overload	P_{max}	5			dBm
LOS De-Assert	LOS_D			-20	dBm
LOS Assert	LOS_A	-28			dBm
LOS Hysteresis		0.5		4.5	dB

6. Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit
Transmitter					
Input Differential Impedance	Z_{in}	90	100	110	Ω
Data Input Swing Differential	V_{in}	250		1200	mV
Tx-Dis Disable	V_d	2.0		V_{cc}	V
Tx-Dis Enable	V_{en}	0		0.8	V
Receiver					
Data Output Swing Differential	V_{out}	250		800	mV
Rx-Los Fault	V_{lf}	2.0		V_{ccHOST}	V
Rx-Los Normal	V_{ln}	0		0+0.8	V
Output rise and fall time	T_r, T_f	30			ps



7. Pin Descriptions

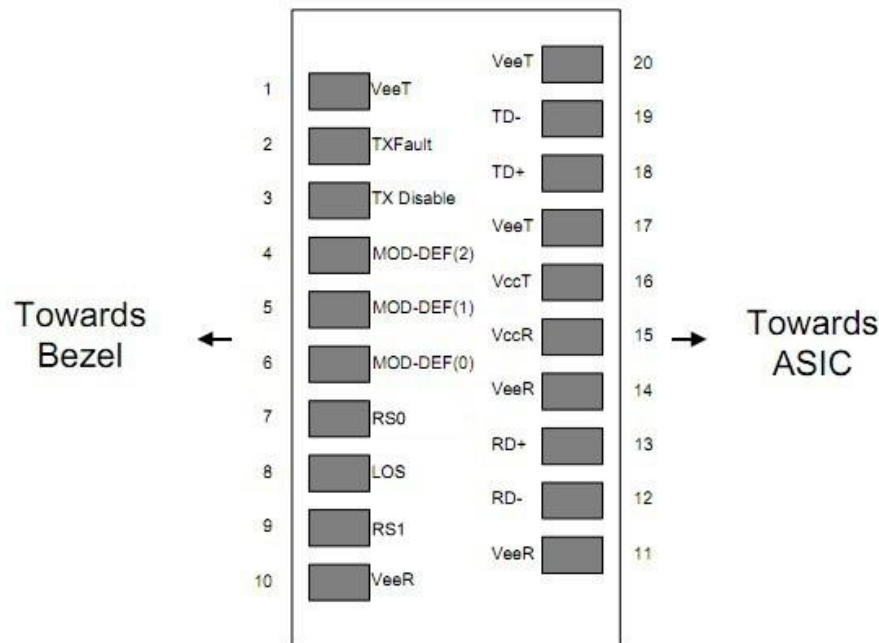


Diagram of Host Board Connector Block Pin Numbers and Names

Pin	Symbol	Description	Ref.
1	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
2	TFAULT	Transmitter Fault. Not supported.	
3	TDIS	Transmitter Disable. Laser output disabled on high or open.	7.2
4	MOD_DEF(2)	Module Definition 2. Data line for Serial ID.	7.3
5	MOD_DEF(1)	Module Definition 1. Clock line for Serial ID.	7.3
6	MOD_DEF(0)	Module Definition 0. Grounded within the module.	7.3
7	RS0	Rate Select0, optionally controls SFP+ module receiver. When high input signaling rate > 4.25 GBd and when low input signaling rate < 4.25 GBd	
8	LOS	Loss of Signal indication. Logic 0 indicates normal operation.	7.4
9	RS1	Rate Select1, optionally controls SFP+ module receiver. When high input signaling rate > 4.25 GBd and when low input signaling rate < 4.25 GBd	
10	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
11	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
12	RD-	Receiver Inverted DATA out. AC Coupled.	



13	RD+	Receiver Non-inverted DATA out. AC Coupled.	
14	VEER	Receiver Ground (Common with Transmitter Ground)	7.1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground (Common with Receiver Ground)	7.1
18	TD+	Transmitter Non-Inverted DATA in. AC Coupled.	
19	TD-	Transmitter Inverted DATA in. AC Coupled.	
20	VEET	Transmitter Ground (Common with Receiver Ground)	7.1

Notes:

- 7.1 Circuit ground is internally isolated from chassis ground.
- 7.2 Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
- 7.3 Should be pulled up with 4.7k - 10kohms on host board to a voltage between 2.0V and 3.6V. MOD_DEF(0) pulls line low to indicate module is plugged in.
- 7.4 LOS is open collector output. Should be pulled up with 4.7k -10kohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

8. EEPROM & DDM THRESHOLD

8.1 EEPROM

2 wire address 1010000X (A0h)

0~95	Serial ID Defined by SFP MSA (96 bytes)
96~127	Vendor Specific (32 bytes)
128~255	Reserved (128 bytes)

EEPROM Serial ID Memory Contents

Add.	Size (Bytes)	Name of Field	Hex	Description
BASE ID FIELDS				
0	1	Identifier	03	SFP
1	1	Ext. Identifier	04	SFP function is defined by serial ID only




2	1	Connector	07	LC
3-10	8	Transceiver	80 00 00 00 00 00 00 00	Transmitter Code
11	1	Encoding	06	64B/66B
12	1	BR, Nominal	67	10.3Gbps
13	1	Reserved	00	
14	1	Length (9um) km	28	40km
15	1	Length (9um) km	FF	
16	1	OM2 Length (50um) m	00	
17	1	OM1 Length (62.5um) m	00	
18	1	Length (Copper)	00	
19	1	OM3 Length (50um) m	00	
20-35	16	Vendor Name	43 2D 4C 49 47 48 54 20 20 20 20 20 20 20 20 20	TINOUT * OEM available
36	1	Reserved	00	
37-39	3	Vendor OUI	00 00 00	* OEM available
40-55	16	Vendor PN	xx xx xx xx xx xx xx xx xx xx xx xx xx xx xx xx	* OEM available
56-59	4	Vendor Rev	30 31 20 20	01
60-61	2	Wavelength	06 0E	1550nm
62	1	Reserved	00	
63	1	CC_BASE	xx	Check Code for Base ID Field
EXTENDED ID FIELDS				
64-65	2	Options	02 1A	Loss/ TX_Fault/ TX_Disable
66	1	BR, Max	00	
67	1	BR, Min	00	
68-83	16	Vendor SN	43 4C xx xx xx xx xx xx xx xx xx 20 20 20 20 20	SN of Transceiver (ASCII). Exp. "CLXXXXXXXXXX"
84-91	8	Date Code	xx xx xx xx xx xx 20 20	YY/MM/DD Exp. 120727
92	1	Diagnostic Monitoring	68	
93	1	Enhanced Options	F0	
94	1	SFF_8472 Compliance	03	
95	1	CC_EXT	checksum	Checksum for Extended ID
VENDOR SPECIFIC ID FIELDS				
96-127	32	Vendor Specific	20 20 20.....	Depends on Customer Info
128-255	128	Reserved	FF FF FF.....	Depends on Customer Info



8.1 DDM THRESHOLD

	Low Alarm	Low Warn	High Warn	High Alarm
Temperature	-10°C	-5°C	75°C	80°C
Voltage	3V	3.1V	3.5V	3.6V
Tx Bias	15mA	20mA	90mA	100mA
Tx Power	-8.7dBm	-4.7dBm	4dBm	6.9dBm
Rx Power	-19.83dBm	-15.83dBm	-1dBm	1.9dBm

9. Mechanical Specifications

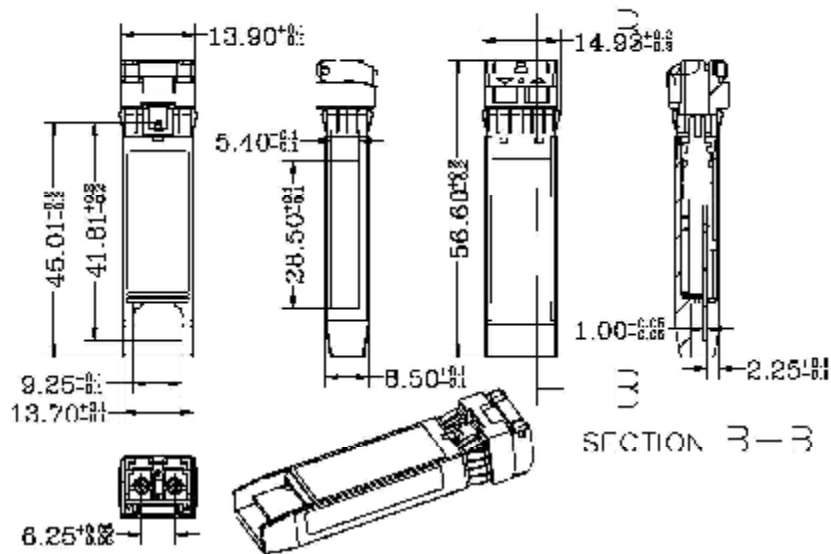

10. LABEL

TINOUT offers label OEM design and print.
 Label barcode supports code128 and 2D barcode
 SIZE: 26mm*10.5mm





Ordering Information

Part No.	Data Rate	DDM	Wave	Fiber Type	Dist.	Temp.	Optical Interface
PLSFPP15192IR40	10Gbps	yes	1550nm	SMF	40km	-5~75°C	LC

VERSION UPDATE:

VERSION NO.	DATE	UPDATED INFORMATION
V20140818	20140818	1. EEPROM& DDM Threshold updated 2. "LABEL" added 3. Ordering information updated 4. Product picture updated

NOTICE:

TINOUT reserves the right to make changes to this product in this specification without notice, in order to improve product performance.

CONTACT:

TINOUT TECHNOLOGY LIMITED

E-mail: CROFT@TINOUT.com <http://www.TINOUT.com>